



Dealing with cluttered ceilings and walls, or glass partitions? Lacking usable wall surface? Artofix baffles are the solution to improve your acoustics and elevate your interior.

TILE MODELS:

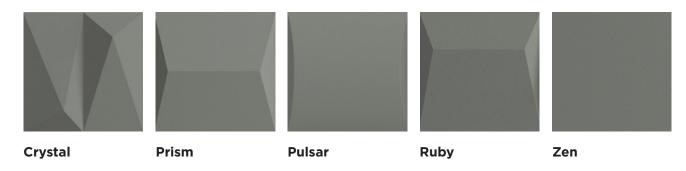



REGULAR INSTALLATION

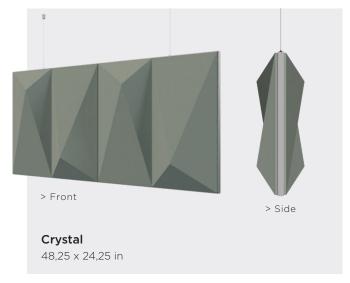















PRODUCT INFORMATION

Model	$\begin{array}{c} \textbf{Dimensions} \\ \mathbb{W} \times \mathbb{H} \end{array}$	Thickness	Acoustic Surface Area	Product Code*
	48,25 x 24,25 in 1225 x 645 mm	8,25 in 210 mm	16 ft² 1,486 m²	CRYA-4824-R-B-***-***
Crystal	72,25 x 24,25 in 1835 x 645 mm	8,25 in 210 mm	24 ft² 2,230 m²	CRYA-7224-R-B-***-***
	96,25 x 24,25 in 2445 x 645 mm	8,25 in 210 mm	32 ft² 2,973 m ²	CRYA-9624-R-B-***-***
	48,25 x 24,25 in 1225 x 645 mm	6,65 in 169 mm	16 ft² 1,486 m²	PRIA-4824-R-B-***
Prism	72,25 x 24,25 in 1835 x 645 mm	6,65 in 169 mm	24 ft² 2,230 m²	PRIA-7224-R-B-***-***
	96,25 x 24,25 in 2445 x 645 mm	6,65 in 169 mm	32 ft² 2,973 m ²	PRIA-9624-R-B-****
	48,25 x 24,25 in 1225 x 645 mm	6,25 in 159 mm	16 ft² 1,486 m²	PULA-4824-R-B-***-***
Pulsar	72,25 x 24,25 in 1835 x 645 mm	6,25 in 159 mm	24 ft² 2,230 m²	PULA-7224-R-B-***-***
	96,25 x 24,25 in 2445 x 645 mm	6,25 in 159 mm	32 ft² 2,973 m²	PULA-9624-R-B-***-***
	48,25 x 24,25 in 1225 x 645 mm	7,05 in 179 mm	16 ft² 1,486 m²	RUBA-4824-R-B-***-***
Ruby	72,25 x 24,25 in 1835 x 645 mm	7,05 in 179 mm	24 ft² 2,230 m²	RUBA-7224-R-B-***-***
	96,25 x 24,25 in 2445 x 645 mm	7,05 in 179 mm	32 ft ² 2,973 m ²	RUBA-9624-R-B-***-***
	48,25 x 24,25 in 1225 x 645 mm	2,25 in 57 mm	16 ft² 1,486 m²	ZENA-4824-R-B-***-***
	72,25 x 24,25 in 1835 x 645 mm	2,25 in 57 mm	24 ft² 2,230 m²	ZENA-7224-R-B-***-***
	96,25 x 24,25 in 2445 x 645 mm	2,25 in 57 mm	32 ft ² 2,973 m ²	ZENA-9624-R-B-***-***
7	48,25 x 12,25 in 1225 x 311 mm	2,25 in 57 mm	8 ft² 0,743 m²	ZENA-4812-R-B-****
Zen	72,25 x 12,25 in 1835 x 311 mm	2,25 in 57 mm	12 ft² 1,115 m²	ZENA-7212-R-B-***-***
	96,25 x 12,25 in 2445 x 311 mm	2,25 in 57 mm	16 ft² 1,486 m²	ZENA-9612-R-B-***-***
	48,25 x 6,25 in 1225 x 159 mm	2,25 in 57 mm	4 ft² 0,372 m²	ZENA-4806-R-B-***-***
	72,25 x 6,25 in 1835 x 159 mm	2,25 in 57 mm	6 ft² 0,557 m²	ZENA-7206-R-B-***-***
	96,25 x 6,25 in 2445 x 159 mm	2,25 in 57 mm	8 ft² 0,743 m²	ZENA-9606-R-B-***-***

*Fabrics

Replace ****- with the fabric-style number, followed by the selected color number.

REGULAR INSTALLATION

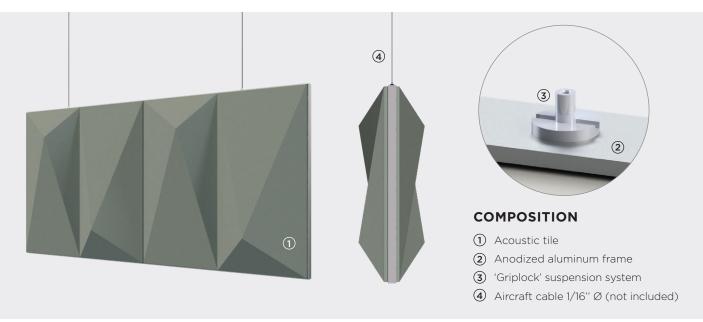

PRODUCT INFORMATION

STANDARD FABRICS

100% polyester (% of recycled fibres depends on choice of fabric) For available styles, consult our website.

FLAMMABILITY

ASTM-E-84: Class A CAN/ULC-S102.2

ACOUSTIC PERFORMANCE***

Noise Reduction Coefficient (Hz) NRC

0.85 : Crystal, Prism, Pulsar, Ruby 0.80 : Zen

SUSPENSION ANCHOR KITS FOR BAFFLE - OPTIONAL

Model		Product Code		Description		
Drywall anchor kit		KITA-0001-B-K-0000-0001	2x	Cable coupler, drywall screw, 60" (1524 mm) cable with pre-installed steel terminal		
Concrete anchor kit		KITA-0002-B-K-0000-0001	2x	Tie Wire wedge anchor for concrete, compression sleeve, 60" (1524 mm) cable		
Steeldeck anchor kit		KITA-0003-B-K-0000-0001	2x	Tie wire lag screw for steel surfaces, compression sleeve, 60" (1524 mm) cable		

INSTALLATION: For more information on ARTOFIX baffles, please refer to the "BAFFLES_Installation guide" document.

IMPORTANT: ARTOFIX baffles must be installed with anchors suitable for the installation surface, ARTOFIX relinquishes all responsibility for incorrectly installed products. Please note that hardware and cables for ceiling mounting are not included but are available as an option.


Need to be inspired? Visit our website www.artofix.com for more details on our products and possible layouts. You can also contact us or reach out to one of our authorized local distributor.

***Results determined through testing by an independent, certified laboratory that was conducted according to industry standards. ASTM C423 - Standard test method for sound absorption coefficients by the reverberation room method. See the Acoustic Performance sheet for more information.

Drawings not to scale. Do not use as template. The information contained in this document is the property of ARTOFIX. Reproduction is prohibited.

+1.450.646.7555 info@artofix.com


artofix.com

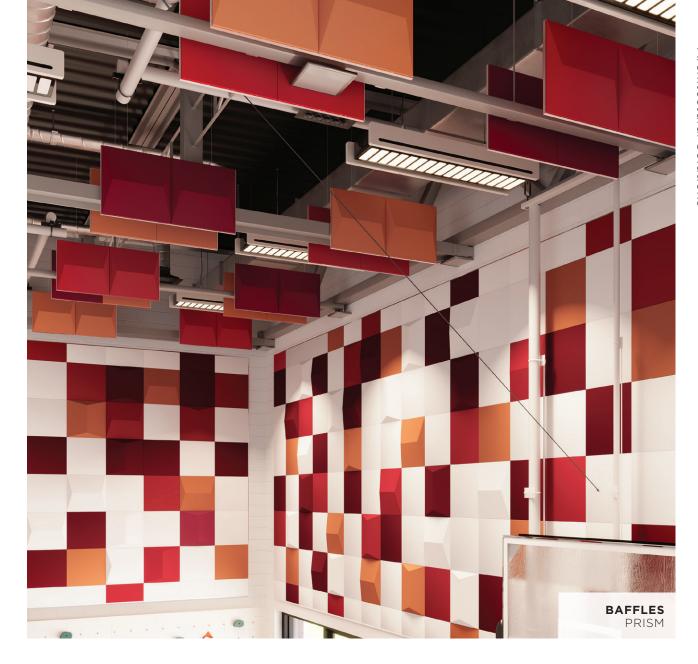


Cluttered ceilings and walls or insufficient space?

Artofix's Sport-Impact baffles are designed specifically for high ceilings and offer an effective solution to energize your sports-oriented environment while controlling acoustic comfort.

TILES MODEL:



SPORT-IMPACT INSTALLATION

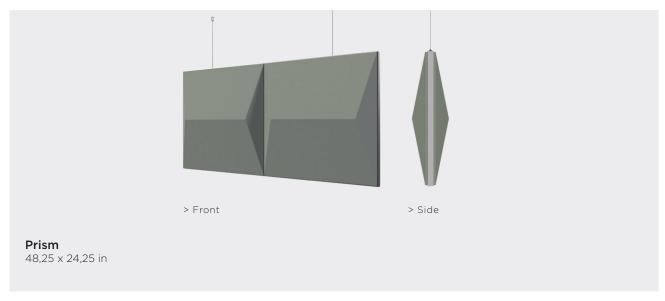






PRODUCT INFORMATION

Model	$\begin{array}{c} \textbf{Dimensions} \\ \text{W} \times \text{H} \end{array}$	Thickness	Acoustic Surface Area	Product Code*
	48,25 x 24,25 in 1225 x 645 mm	6,65 in 169 mm	16 ft² 1,486 m²	PRIA-4824-S-B-***-***
Prism	72,25 x 24,25 in 1835 x 645 mm	6,65 in 169 mm	24 ft² 2,230 m²	PRIA-7224-S-B-***-***
	96,25 x 24,25 in 2445 x 645 mm	6,65 in 169 mm	32 ft² 2,973 m²	PRIA-9624-S-B-***-***
	48,25 x 24,25 in 1225 x 645 mm	2,25 in 57 mm	16 ft² 1,486 m²	ZENA-4824-S-B-***-***
	72,25 x 24,25 in 1835 x 645 mm	2,25 in 57 mm	24 ft ² 2,230 m ²	ZENA-7224-S-B-***-***
Zen	96,25 x 24,25 in 2445 x 645 mm	2,25 in 57 mm	32 ft ² 2,973 m ²	ZENA-9624-S-B-***-***
	48,25 x 12,25 in 1225 x 311 mm	2,25 in 57 mm	8 ft² 0,743 m²	ZENA-4812-S-B-***-***
	72,25 x 12,25 in 1835 x 311 mm	2,25 in 57 mm	12 ft ² 1,115 m ²	ZENA-7212-S-B-***-***
	96,25 x 12,25 in 2445 x 311 mm	2,25 in 57 mm	16 ft ²² 1,486 m ²	ZENA-9612-S-B-***_***

*Fabrics

Replace ****- with the fabric-style number, followed by the selected color number.

SPORT-IMPACT INSTALLATION

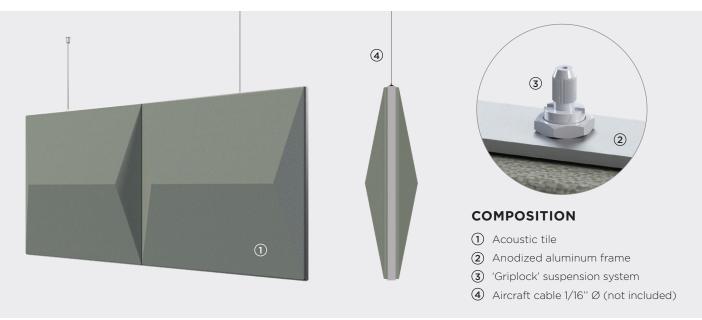

PRODUCT INFORMATION

STANDARD FABRICS

100% polyester (% of recycled fibres depends on choice of fabric) For available styles, consult our website.

FLAMMABILITY

ASTM-E-84: Class A CAN/ULC-S102.2

ACOUSTIC PERFORMANCE***

Noise Reduction Coefficient (Hz) NRC

0.85 : Prism 0.80 : Zen

SUSPENSION ANCHOR KITS FOR BAFFLE - OPTIONAL

Model		Product Code		Description		
Concrete anchor kit		KITA-0002-B-K-0000-0001	2x	Tie Wire wedge anchor for concrete, compression sleeve, 60" (1524 mm) cable		
Steeldeck anchor kit		KITA-0003-B-K-0000-0001	2x	Tie wire lag screw for steel surfaces, compression sleeve, 60" (1524 mm) cable		

INSTALLATION: For more information on ARTOFIX baffles, please refer to the "SPORT-IMPACT_BAFFLES_Installation guide" document.

IMPORTANT: ARTOFIX baffles must be installed with anchors suitable for the installation surface, ARTOFIX relinquishes all responsibility for incorrectly installed products. Please note that hardware and cables for ceiling mounting are not included but are available as an option.

Need to be inspired? Visit our website www.artofix.com for more details on our products and possible layouts. You can also contact us or reach out to one of our authorized local distributor.

***Results determined through testing by an independent, certified laboratory that was conducted according to industry standards. ASTM C423 - Standard test method for sound absorption coefficients by the reverberation room method. See the Acoustic Performance sheet for more information.

Drawings not to scale. Do not use as template. The information contained in this document is the property of ARTOFIX. Reproduction is prohibited.

+1.450.646.7555 info@artofix.com

artofix.com