




**SOLO 8' x 6'**  
ZEN 2424 // Layout ZENP-S1

SOLO from Artofix enhance your space while improving acoustics. Its predefined layouts make for hassle-free installation, as does its elegant design. Get inspired by the different configurations.


**AVAILABLE TILE MODELS :**



**Crystal**  
24 x 24 in  
610 x 610 mm





**Prism**  
24 x 24 in  
610 x 610 mm



**Zen**  
24 x 24 in  
610 x 610 mm

# SOLO




FORMAT 8' X 6'

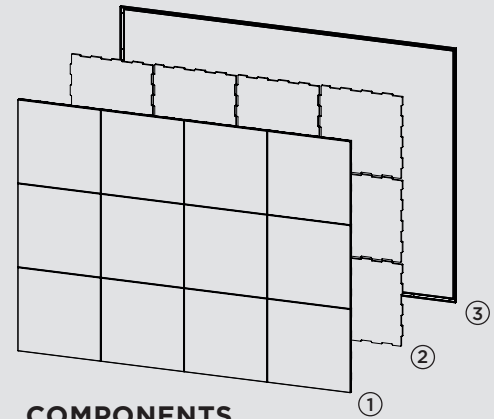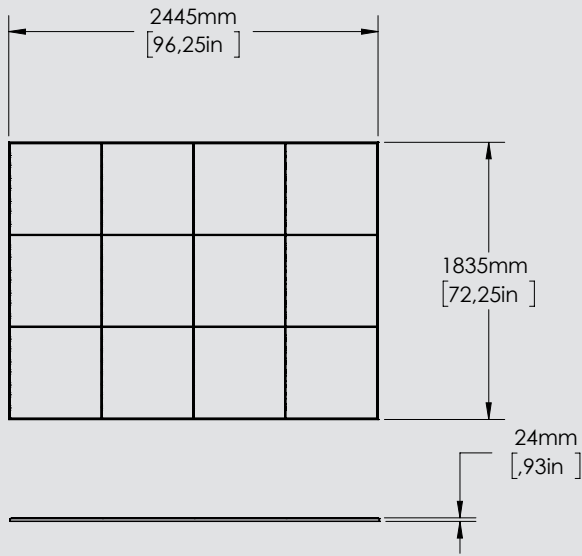

## COMPONENTS

- ① Tiles
- ② Acoustics Lining (stone wool)
- ③ Artotrim-C1 pre-cut moldings (anodized aluminum)

## PRODUCT INFORMATION


	Model	Dimensions W x H	Thickness	Acoustic Surface Area	Codes SOLO <sup>†</sup>	Artotrim-C1* (included)	Artoclips** (included)
	<b>Crystal</b> Solo 6 x 8 (12 tiles)	96,25 x 72,25 in 2445 x 1835 mm	4,02 in 102 mm	48 ft <sup>2</sup> 4,46 m <sup>2</sup>	CRYP-9672-R-S-2335-****	2x (72 in) 2x (96 in)	28
	<b>Prism</b> Solo 6 x 8 (12 tiles)	96,25 x 72,25 in 2445 x 1835 mm	3,30 in 84 mm	48 ft <sup>2</sup> 4,46 m <sup>2</sup>	PRIP-9672-R-S-2335-****	2x (72 in) 2x (96 in)	28
	<b>Zen</b> Solo 6 x 8 (12 tiles)	96,25 x 72,25 in 2445 x 1835 mm	0,93 in 24 mm	48 ft <sup>2</sup> 4,46 m <sup>2</sup>	ZENP-9672-R-S-2335-****	2x (72 in) 2x (96 in)	28

## CHOICE OF FABRICS

Anchorage Fabric 2335




**White**  
2664




**Slate**  
2017



**Asteroid**  
2053



**Deep Water**  
2051



**Graphite**  
2079

### †Fabrics

Replace \*\*\*\* by the color number

### \*Pre-cut perimeter moldings

\*\*Tile retention clips at frame perimeter

## ANCHORAGE FABRICS

Anchorage 2335  
65% pre-consumer recycled polyester  
35% post-consumer recycled polyester

## FLAMMABILITY

ASTM-E-84  
CAN/ULC-S102.2

## ACOUSTIC PERFORMANCE\*\*\*


Noise Reduction Coefficient (Hz)  
NRC 0.80

# SOLO


FORMAT 6' X 8'

## TILE LAYOUT


### Crystal




CRYP-S1




CRYP-S2




CRYP-S3




CRYP-S4




CRYP-S5



CRYP-S6




CRYP-S7




CRYP-S8


### Prism




PRIP-S1




PRIP-S2




PRIP-S3




PRIP-S4




PRIP-S5



PRIP-S6




PRIP-S7



PRIP-S8

### Zen



ZENP-S1

For more details on our products and possible layouts, you can contact us or reach out to an authorized local distributor.

\*\*\*Results determined through testing by an independent, certified laboratory that was conducted according to industry standards. ASTM C423-09a. Standard test method for sound absorption coefficients by the reverberation room method. ASTM E795 standard practice for mounting test samples during sound absorption tests.

Drawings not to scale. Do not use as template. The information contained in this document is the property of ARTOFIX. Reproduction is prohibited.  
PRODUCT SHEET\_2023-11

+1.450.646.7555  
info@artofix.com

**artofix.com**